




V06

PATENTED

UNIVERSAL ELECTRIC LOCK
*for manual or automatic doors, entry doors
and pedestrian and drive-through gates*



- Supplied with the **service function (single pulse)**, the lock opens with the electric impulse and only resets once the gate has been opened and then closed. This is the most common way of operating: it is therefore suitable for use with door closers and/or automation systems.
- By simply removing an internal component, the V06 acquires the **security function (continuous pulse)**, the lock opens only when the electric impulse and manual or automatic pressure are applied simultaneously to the door. If none is opening the door while the electric impulse is given, the door remains closed, avoiding accidental openings. This is the ideal solution when maximum security is required, like in the case of jewelry stores or monitored warehouses.

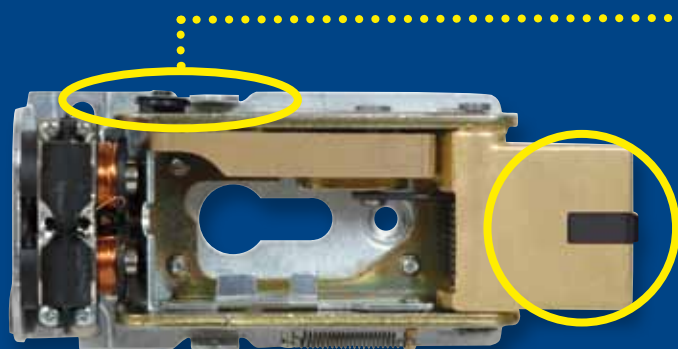


HIGH RESISTANCE SOLID BRASS ROTATING DEADBOLT with nylon insert which makes the locking more silent

SUITABLE FOR BOTH HORIZONTAL AND VERTICAL INSTALLATION

- Power supply: 12V A.C. (on request 12V D.C., 24V A.C. or D.C.)
- Fully galvanized anti-oxidation and corrosion-proof.
- Ensured correct working of the lock even if there is a vertical adjustment between the lock and the striker (a common occurrence due to weather changes).
- Suitable for European profile double or half cylinders (not supplied with the lock, but it may be ordered separately).



Anthracite colour painted version for wooden doors, with nylon handle and standard striker (item 1.7918.469) and anthracite colour painted roof-plate (item 9990.469)

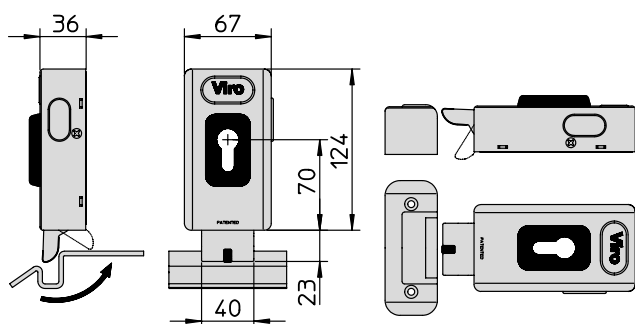

SUPPLIED WITH:

- Floor striker for vertical installation (item. 9986).
- For horizontal installation, ask for the standard striker instead of the floor striker (item 7912.117.217), without surcharge.

ON REQUEST:

- For horizontal installation: kit (item 1.7918.0600) composed of: nylon handle, galvanized roof plate and striker plate to be placed under the striker to fill further spaces between the jamb and the gate.
- For vertical installation: galvanized roof plate (item 9989).
- Anthracite colour painted version for wooden doors, with nylon handle and standard striker (item 1.7918.469) and anthracite colour painted roof-plate (item 9990.469).