


ITEMS 8234 AND 1.8252

STRUCTURAL FEATURES

- **Structure** and internal components in galvanized steel.
- DIN standard through **holes** for mounting security escutcheon.
- **Straight vertical deadbolt**, 3 mm thick steel, 24 mm projection.
- **8 mm** handle hole.
- Sintered steel **handle hole cam**.
- **On request:** carbonitridated and galvanized steel pull-resistant and anti-drill security escutcheon; grip handle pair in galvanized steel; closing rod and black nylon escutcheon.
- **Items 8234 and 1.8252** are supplied in boxes containing:
 - ✓ 2 locks;
 - ✓ 2 non-riveted deadbolts pins (only for item 8234);
 - ✓ 2 cylinder fixing screws (cylinder not supplied).

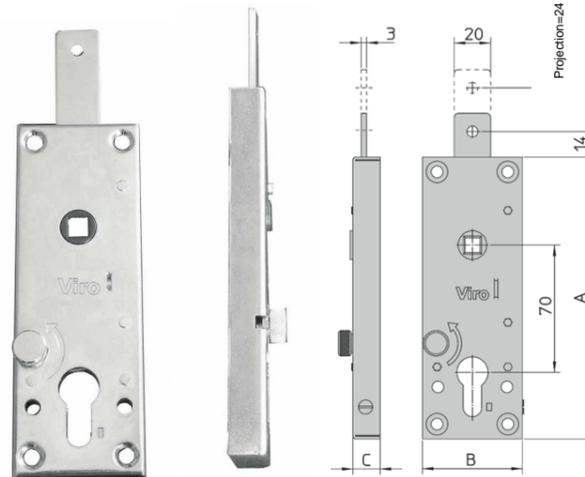


Item 8234
N:B: cylinder not provided

Registered Patent

OPERATIONAL FEATURES

- **Interchangeable** with most up and over door locks available on the market.
- **CAN BE ARMoured** simply by mounting a security escutcheon.
- **Deadbolt operated by outside and inside handle** (grip handle pair item 8217.600, is not supplied but may be ordered separately).
- **Spring loaded knob**, with easy grip for opening from the inside, impossible to force from the outside with burglary tools.

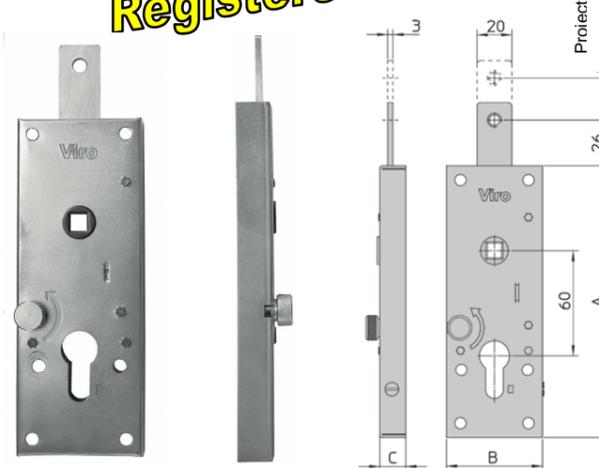

Item 1.8252
N:B: cylinder not provided

ITEM 806

Item 806 consists of:

- 1 Security escutcheon (to be installed directly on the outside of sheet metal up and over doors, if thick enough, or of wooden up and over doors);
- 1 zinc plated steel ring (to be installed under the escutcheon on the outside of thin up and over doors);
- 2 screws and 2 washers (for fixing from the inside).



The use of the lock combined with the security escutcheon (Item 8234 or Item 1.8252 + Item 806) offers maximum resistance and less installation TIME and lower COSTS compared to traditional locks with armoured cylinder .




ITEM No.	Dimensions A x B x C mm	Unit weight g	Pcs. per pack No.
8234	155 x 55 x 15	395	2
1.8252	160 x 60 x 16,5	415	2




Item 8234

Item 1.8252

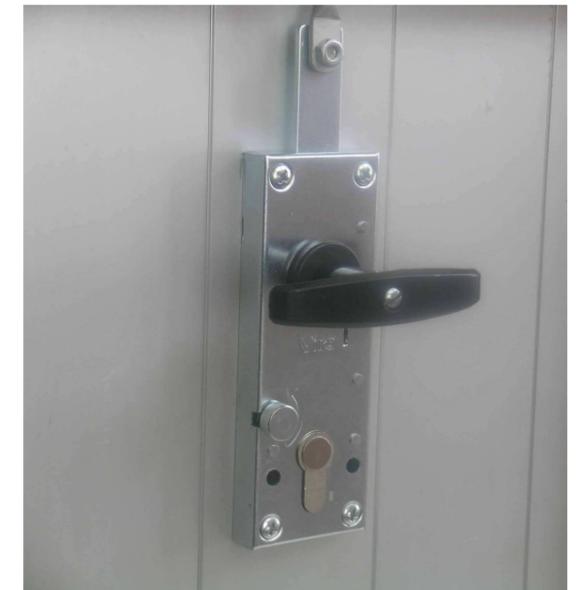

DIN standard through hole screws for mounting security escutcheon.

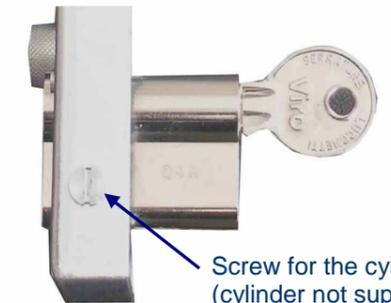

Screw for the cylinder fixing (cylinder not supplied).

Spring loaded knob, with easy grip for opening from the inside, impossible to force from the outside with burglary tools.



ACCESSORIES



ITEM 2.0.4706.065.00.000
BLACK NYLON ESCUTCHEON.

ITEM 8234.0028
GALVANIZED STEEL TUBULAR ROD, VARIABLE LENGHT FROM 78 TO 145 cm + FIXING SCREWS.

ITEM 2.08217.600.00.000
GRIP HANDLE PAIR.